


iKUBE

K20

Technical Sheet

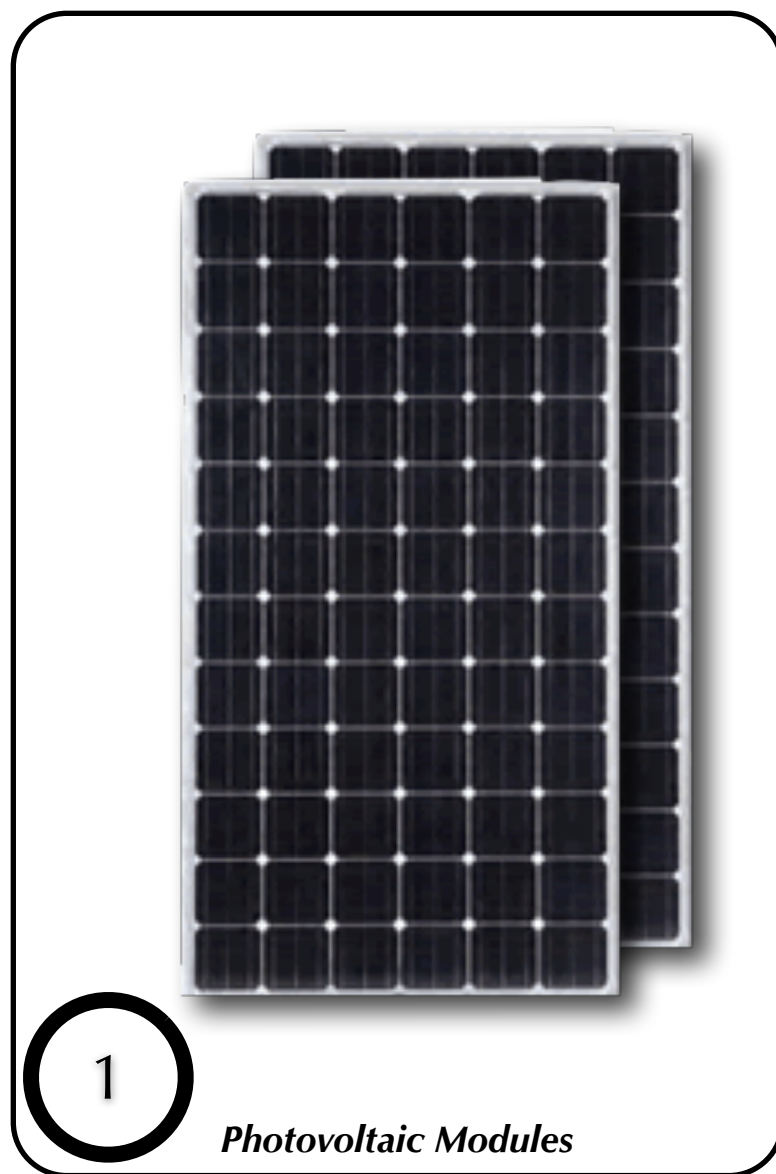


iKUBE
K20

● **Stand Alone Technical Sheet**

- Electric Diagram
- Technical Characteristics
- Contacts

K20: Electric Diagram

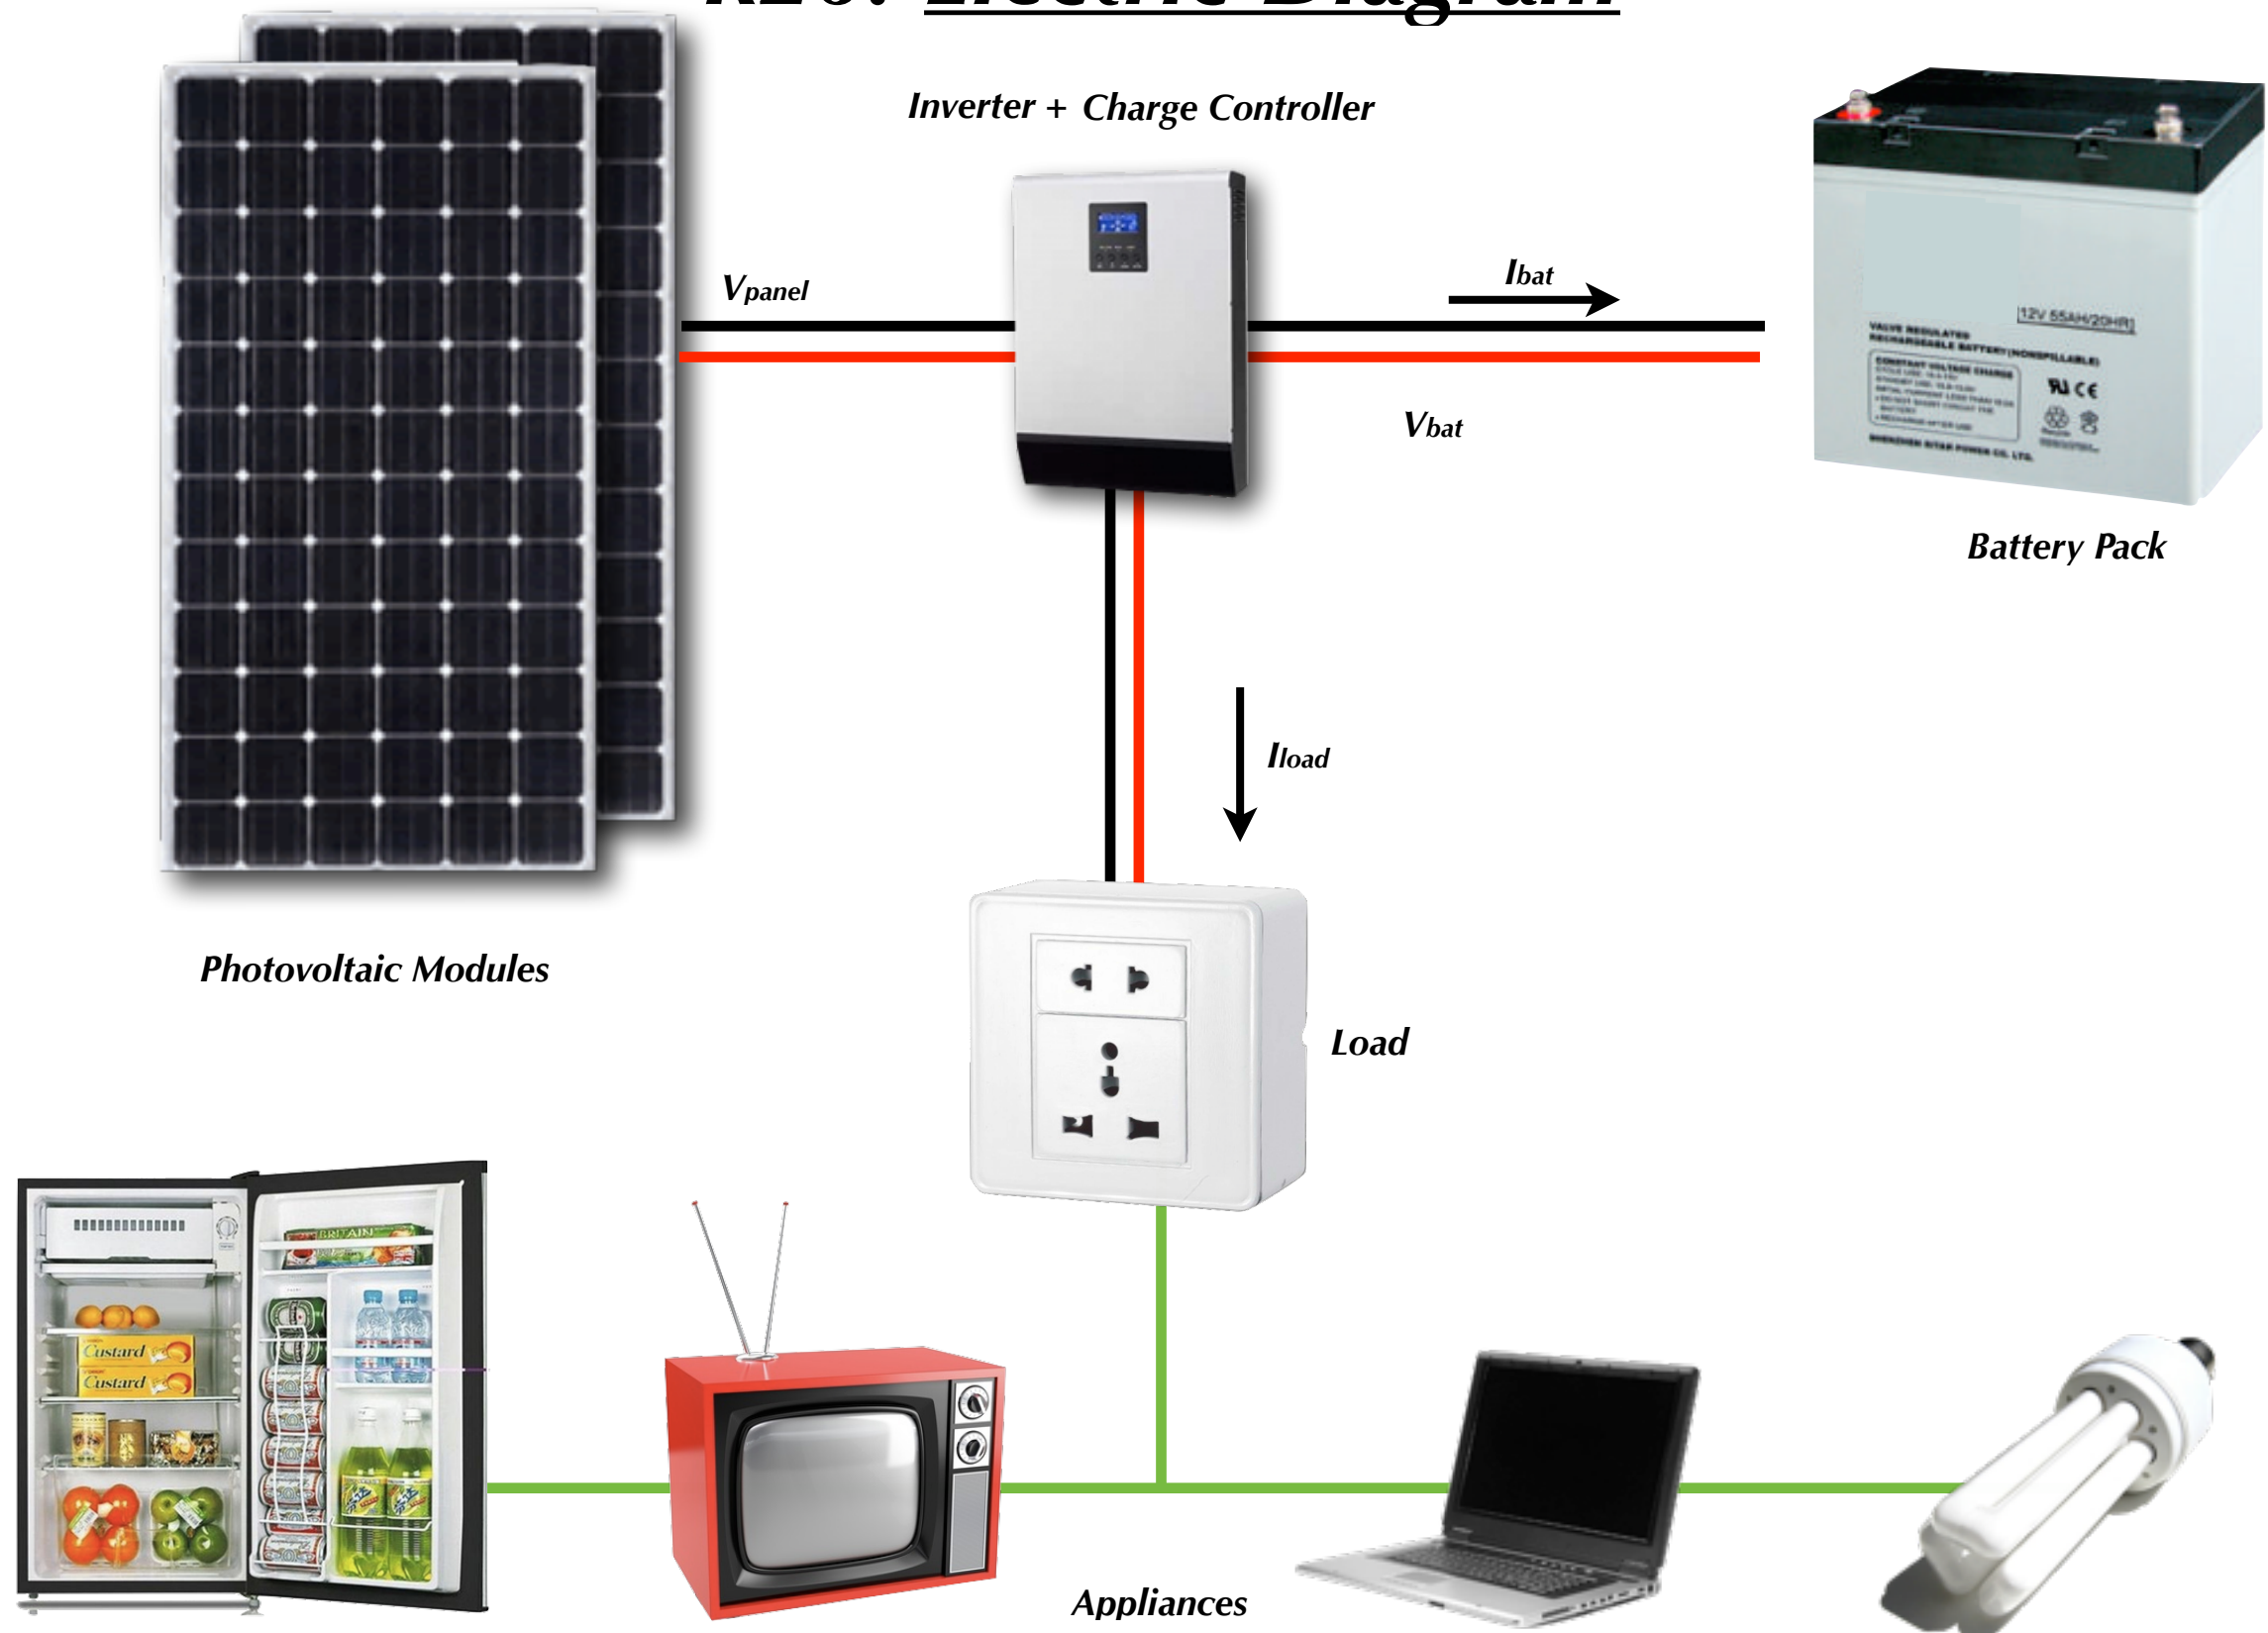

K20: Technical Characteristics

PV Module



x 2

190 Wp !

ELECTRICAL DATA

Nominal power	Pm (Wp)	95
Open circuit voltage	Voc (V)	21.96
Short-circuit current	Isc (A)	5.78
Voltage at max power	Vmp (V)	18.36
Current at max power	Imp (A)	5.18
Module efficiency	(%)	14.39
Cells efficiency	(%)	17.22
System Voltage	(V)	1000
Temp. coefficient Voc	(% / °C)	-0.36
Temp. coefficient Isc	(% / °C)	0.06
Temp. coefficient Pm	(% / °C)	-0.36
Operating temp.	(°C)	-40 bis +85
NOCT	(°C)	45±2

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.



K20: Technical Characteristics

PV Module


TECHNICAL DATA

Junction box	2 bypass diodes, IP67
Wire cross section (\varnothing , mm ²)	4.0
Cable lenght (mm)	900
Connector type	MC4/MC4 compatible
Dimensions (L x W x H, mm)	1200 x 550 x 35
Weight (kg)	5.78
Cell dimensions (mm)	125 x 125
No of cells / assembly	36 / 4 x 9
Type of cells	mono-crystalline
Hail resistance	Max. \varnothing 25 mm at 23 m/s
Wind load	2400Pa / 244kg / m ²
Mechanical load	5400Pa / 550kg / m ²


SCALE

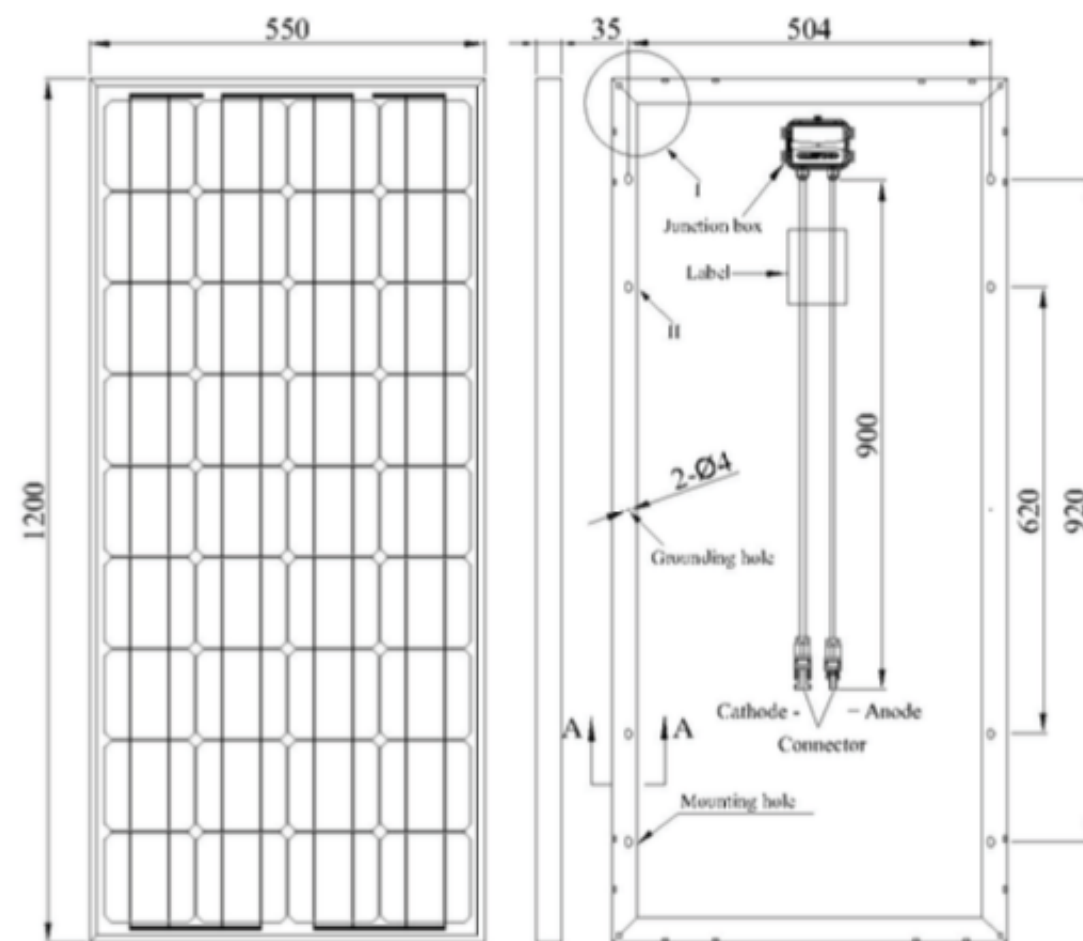

I



Mounting hole II



Section A-A

K20: Technical Characteristics

Inverter




- Pure sine wave inverter
- Selectable input voltage range for home appliances and personal computers
- Selectable charging current based on applications
- Configurable AC/Solar input priority via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Overload and short circuit protection
- Smart battery charger design for optimized battery performance
- Cold start function

RATED POWER	1000VA/800W
INPUT	
Voltage	230 VAC
Selectable Voltage Range	170-280 VAC (For Personal Computers) ; 90-280 VAC (For Home Appliances)
Frequency Range	50 Hz/60 Hz (Auto sensing)
OUTPUT	
AC Voltage Regulation (Batt. Mode)	230VAC \pm 5 %
Surge Power	2000VA
Efficiency (Peak)	93%
Transfer Time	10 ms (For Personal Computers); 20 ms (For Home Appliances)
Waveform	Pure sine wave
BATTERY & AC CHARGER	
Battery Voltage	12 VDC
Floating Charge Voltage	13,5 VDC
Overcharge Protection	15 VDC
Maximum Charge Current	10 A or 20 A
SOLAR CHARGER	
Maximum PV Array Open Circuit V	30VDC
Maximum Charging Current	50A
Standby Power Consumption	1 W
PHYSICAL	
Dimension, D x W x H (mm)	95 x 240 x 316
Net Weight (kgs)	5.0
OPERATING ENVIRONMENT	
Humidity	5% to 95% Relative Humidity(Non-condensing)
Operating Temperature	0°C - 55°C
Storage Temperature	-15°C - 60°C


K20: Technical Characteristics

Inverter

Overview

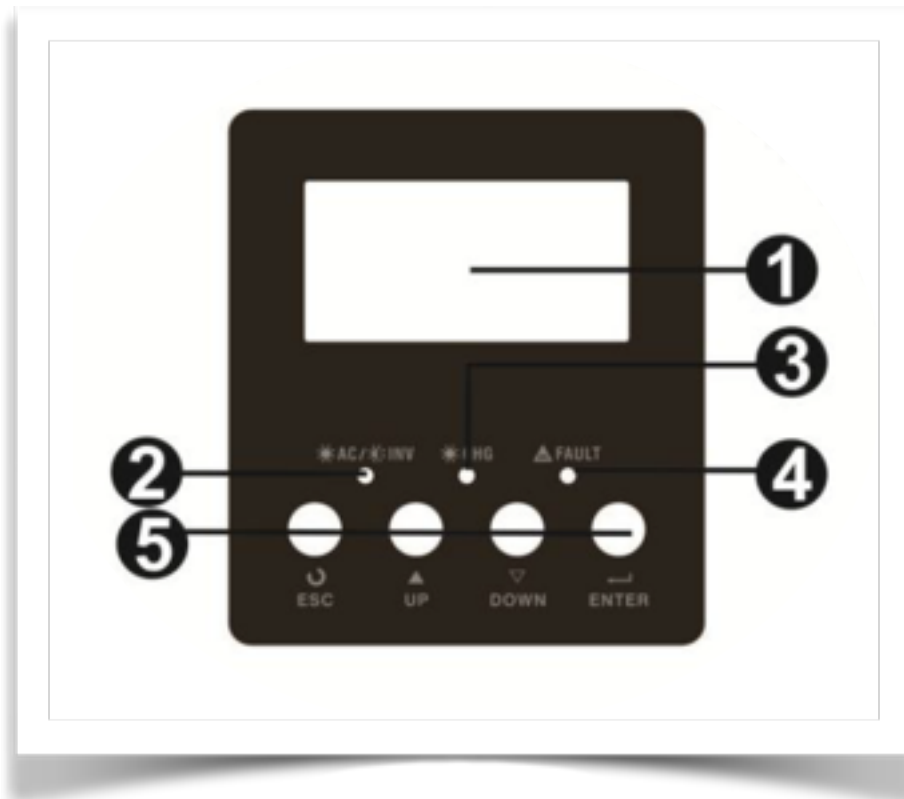

1. LCD display
2. Status indicator
3. Charging indicator
4. Fault indicator
5. Function buttons
6. Power on/off switch
7. AC input

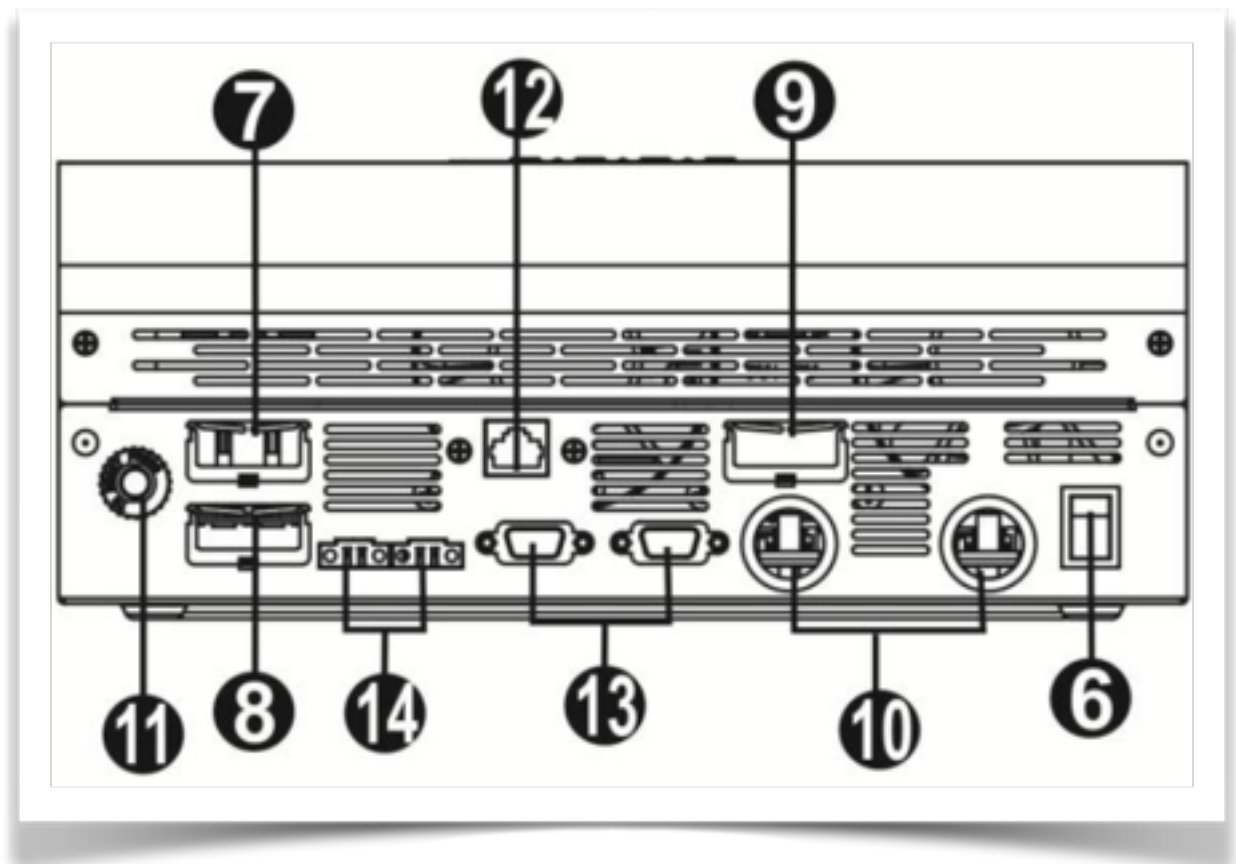










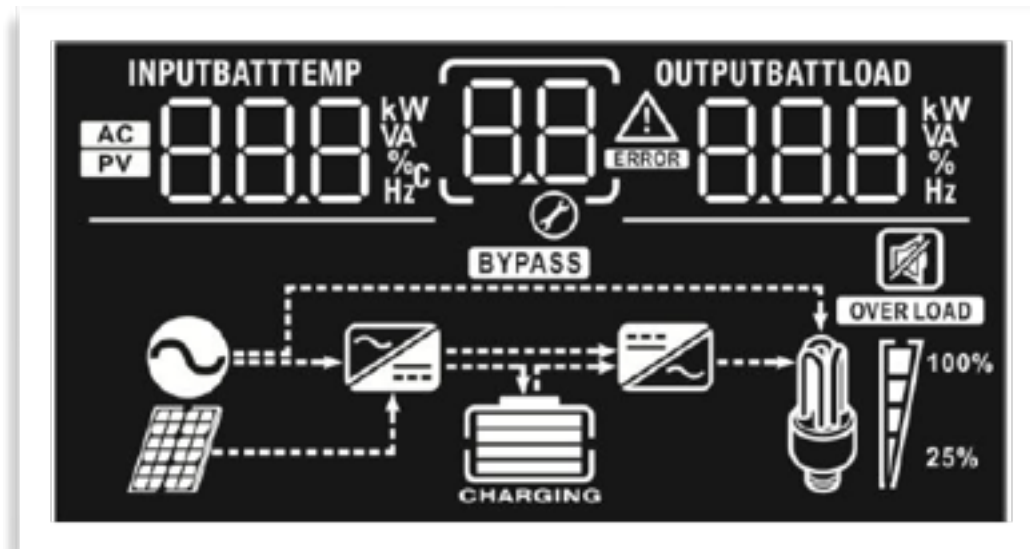



8. AC output
9. PV input
10. Battery input
11. Circuit breaker
12. RS232 communication port
13. Parallel communication cable (only for parallel model)
14. Current sharing cable (only for parallel model)










K20: Technical Characteristics

Inverter

LCD Information



Load Information				
		Indicates overload.		
 100% 25%	Indicates the load level by 0-24%, 25-50%, 50-74% and 75-100%.			
	0%~25%	25%~50%	50%~75%	75%~100%
				
Mode Operation Information				
		Indicates unit connects to the mains.		
		Indicates unit connects to the PV panel.		
		Indicates load is supplied by utility power.		
		Indicates the utility charger circuit is working.		
		Indicates the DC/AC inverter circuit is working.		
Mute Operation				
		Indicates unit alarm is disabled.		

Icon	Function description	
Input Source Information		
	Indicates the AC input.	
	Indicates the PV input	
	Indicate input voltage, input frequency, PV voltage, battery voltage and charger current.	
Configuration Program and Fault Information		
	Indicates the setting programs.	
	Indicates the warning and fault codes. Warning:  flashing with warning code. Fault:  lighting with fault code	
Output Information		
	Indicate output voltage, output frequency, load percent, load in VA and load in Watt.	
Battery Information		
	Indicates battery level by 0-24%, 25-49%, 50-74% and 75-100% in battery mode and charging status in line mode.	
In AC mode, it will present battery charging status.		
Status	Battery voltage	LCD Display
Constant Current mode / Constant Voltage mode	<2V/cell	4 bars will flash in turns.
	2 ~ 2.083V/cell	Bottom bar will be on and the other three bars will flash in turns.
	2.083 ~ 2.167V/cell	Bottom two bars will be on and the other two bars will flash in turns.
	> 2.167 V/cell	Bottom three bars will be on and the top bar will flash.
Floating mode. Batteries are fully charged.		4 bars will be on.

K20: Technical Characteristics

Battery Pack

DC 145 Ah C10 12V



x 1

AGM Technology


A key feature of AGM batteries is the phenomenon of internal gas recombination.

As a charging lead-acid battery nears full state of charge, hydrogen and oxygen gasses are produced by the reactions at the negative and positive plates, respectively.

In a flooded battery, these gasses escape from the battery through the vents, thus requiring periodic water additions.

In an AGM battery the excellent ion transport properties of the liquid electrolyte held suspended in the glass mats, the oxygen molecules can migrate from the positive plate and recombine with the slowly evolving hydrogen at the negative plate and form water again. Under conditions of controlled charging, the pressure relief vents in AGM batteries are designed to remain closed, preventing the release of any gasses and water loss.

Unit: mm Dimension: 340(L)×173(W)×280(H)


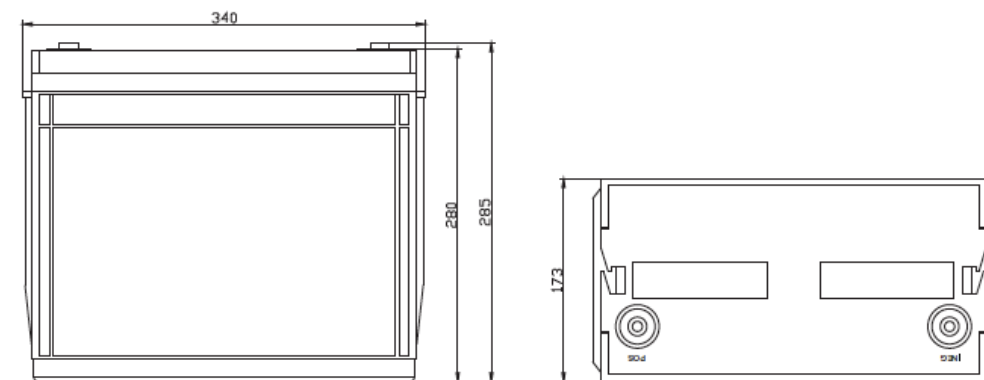


Cells Per Unit	6
Voltage Per Unit	12
Capacity	145Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 44.0 Kg (Tolerance ± 1.5%)
Max. Discharge Current	1450 A (5 sec)
Internal Resistance	Approx. 4 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	43.5 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F5/F12
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

K20: Technical Characteristics

Battery Pack

Discharge & Duration

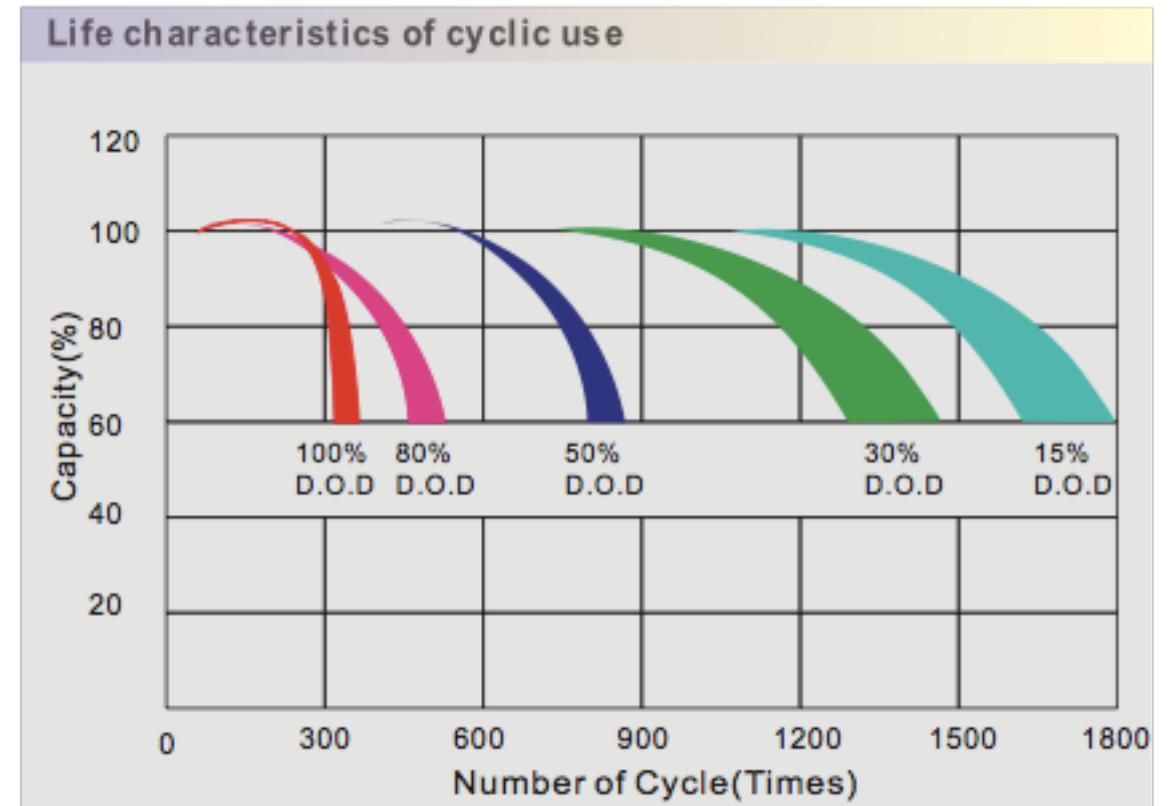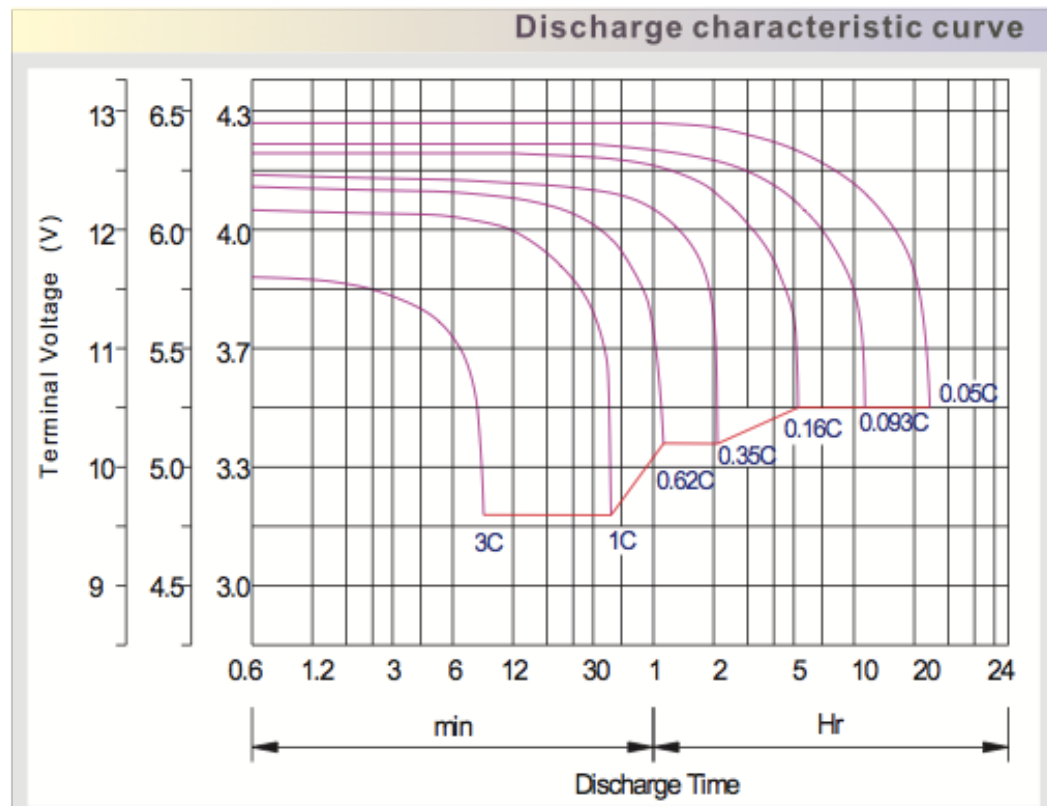

Capacity Factors With Different Temperature

Battery Type		-20℃	-10℃	0℃	5℃	10℃	20℃	25℃	30℃	40℃	45℃
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

K20: Technical Characteristics

Battery Pack

<i>Power (W)</i>	<i>Remaining Hours</i>
50	40,6
100	17,2
150	10,4
300	4,4
500	2,3
800	1,3
1500	-

The above Datas are referred to the standard battery pack contained in the iKube.

K20: Technical Characteristics

iKUBE K20



Inverter Power	800 W
Box Dimensions	0,36x0,46x0,40 m
Box Weight	60 Kg
Battery Pack	12V 145 Ah
Generator Power	190 Wp
N. PV Modules	2

Product specifications are subject to change without further notice.

CONTACTS

Company:

PRO D3 Srl

Address:

**Via Ho Chi Min 12 – 60022 Castelfidardo
(Ancona) - Italy**

Email:

info@ikube.it

Web:

www.ikube.it

Business Partner



ANCONA

ITALIA

IT 